


General Specification:

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10°C~70°C、
35%~85%RH
- Storage Temperature : -40°C~80°C、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

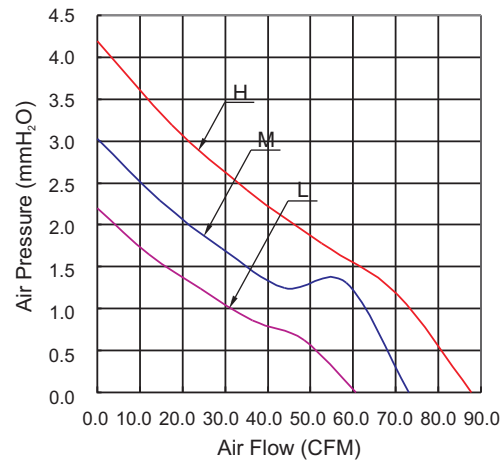

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight g
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	
12025D12HS	Sleeve	12	6.0~13.8	0.40	2,400	87.7	4.1	41	•	•	•	•	164
12025D12MS			6.0~13.8	0.23	2,000	73.0	3.0	36	•	•	•	•	
12025D12LS			6.0~13.8	0.18	1,700	60.5	2.2	31	•	•	•	•	
12025D12HB	Ball		6.0~13.8	0.40	2,400	87.7	4.1	41	•	•	•	•	
12025D12MB			6.0~13.8	0.23	2,000	73.0	3.0	36	•	•	•	•	
12025D12LB			6.0~13.8	0.18	1,700	60.5	2.2	31	•	•	•	•	
12025D24HS	Sleeve	24	12.0~27.6	0.35	2,400	87.7	4.1	41	•	•			164
12025D24MS			12.0~27.6	0.20	2,000	73.0	3.0	36	•	•			
12025D24LS			12.0~27.6	0.13	1,700	60.5	2.2	31	•	•			
12025D24HB	Ball		12.0~27.6	0.35	2,400	87.7	4.1	41	•	•			
12025D24MB			12.0~27.6	0.20	2,000	73.0	3.0	36	•	•			
12025D24LB			12.0~27.6	0.13	1,700	60.5	2.2	31	•	•			

* all model could be customized on voltage or any other requirements to fit your need

* [http:// www.jingdafan.com](http://www.jingdafan.com)