


General Specification:

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10°C~70°C、
35%~85%RH
- Storage Temperature : -40°C~80°C、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

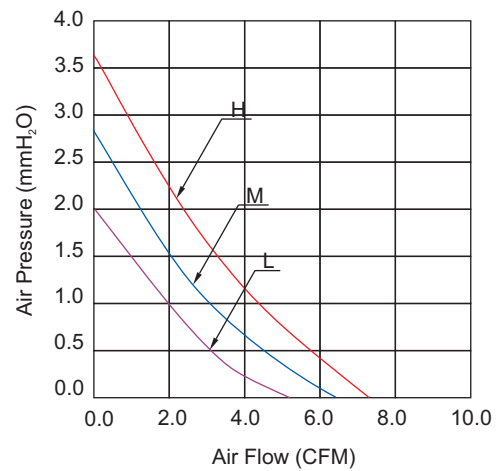

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	
4010D5HS	Sleeve	5	3.5~5.75	0.20	7,000	7.6	3.7	33	•	•			9
4010D5MS			3.5~5.75	0.16	6,000	6.4	2.8	28	•	•			
4010D5LS			3.5~5.75	0.13	5,000	5.2	2.0	24	•	•			
4010D5HB	Ball		3.5~5.75	0.20	7,000	7.6	3.7	33	•	•			
4010D5MB			3.5~5.75	0.16	6,000	6.4	2.8	28	•	•			
4010D5LB			3.5~5.75	0.13	5,000	5.2	2.0	24	•	•			
4010D12HS	Sleeve	12	6.0~13.8	0.09	7,000	7.6	3.7	33	•	•			16
4010D12MS			6.0~13.8	0.07	6,000	6.4	2.8	28	•	•			
4010D12LS			7.0~13.8	0.06	5,000	5.2	2.0	24	•	•			
4010D12HB	Ball		6.0~13.8	0.09	7,000	7.6	3.7	33	•	•			
4010D12MB			6.0~13.8	0.07	6,000	6.4	2.8	28	•	•			
4010D12LB			7.0~13.8	0.06	5,000	5.2	2.0	24	•	•			
4010D24HS	Sleeve	24	12.0~27.6	0.09	7,000	7.6	3.7	33	•	•			16
4010D24MS			12.0~27.6	0.06	6,000	6.4	2.8	28	•	•			
4010D24LS			16.0~27.6	0.05	5,000	5.2	2.0	24	•	•			
4010D24HB	Ball		12.0~27.6	0.09	7,000	7.6	3.7	33	•	•			
4010D24MB			12.0~27.6	0.06	6,000	6.4	2.8	28	•	•			
4010D24LB			16.0~27.6	0.05	5,000	5.2	2.0	24	•	•			

* all model could be customized on voltage or any other requirements to fit your need
 * [http:// www.jingdafan.com](http://www.jingdafan.com)